


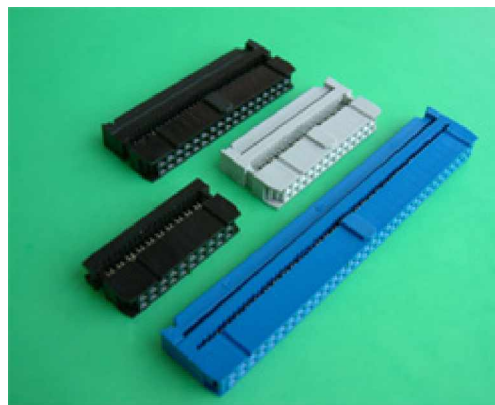

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Brass or Phosphor Bronze

Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area

Gold plated: 3u" over 50u" nickel

Cable: 1.27mm (0.050") pitch flat cable

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩ max. at DC 100mA

Operating Temperature: -55 ~+105

Features:




- * Optional polarizing key, polarizing bump.
- * Optional strain relief.
- * Choices of go, ld plated or selective gold plated.

Yueqing shi kaifa electronic co.,ltd

Tel: 0086-13634204680

<http://www.china-electrical-supplier.com>

master@china-electrical-supplier.com

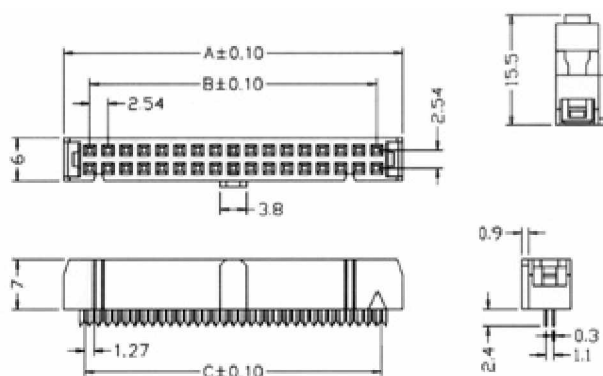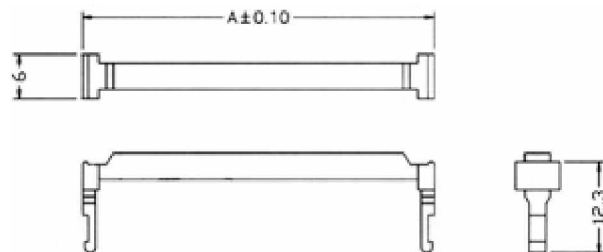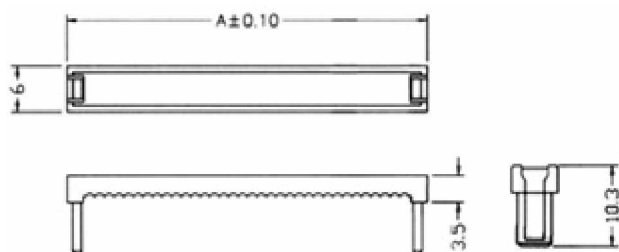

Position	Dimension		
	A	B	C
06	12.22	5.08	6.35
08	14.76	7.62	8.89
10	17.30	10.16	11.43
14	22.38	15.24	16.51
16	24.92	17.78	19.05
20	30.00	22.86	24.13
24	35.08	27.94	29.21
26	37.62	30.48	31.75
30	42.70	35.56	36.83
34	47.78	40.64	41.91
40	55.40	48.26	49.53
50	68.10	60.96	62.23
60	80.80	73.66	74.93
64	85.88	78.74	80.01

Ordering information

ZP	101-	☐	☐	☐	☐	☐
Series	No.of Pin Count	0:Selective Gold 1:Gold Plated	0:Black 1:Grey 2:Blue	0:With S.R 1:Without S.R	0:With C.B 1:Without C.B	