

Material:

Housing:30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
 Gold plated: 3u" over 50u" nickel
 Cable: 1.00mm (0.039") pitch fiat cable

Electrical Characteristics:




Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105

Features:

- * Optional polarizing key, polarizing bump.
- * Optional strain relief.
- * Choices of gold plated or selective gold plated.

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com

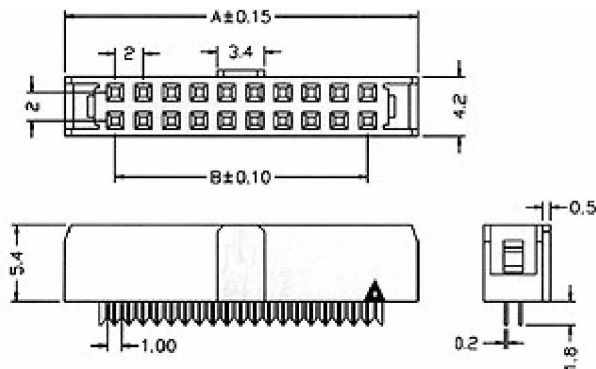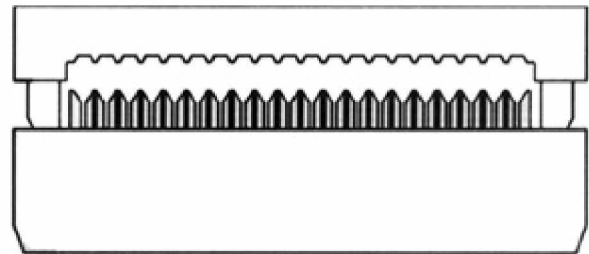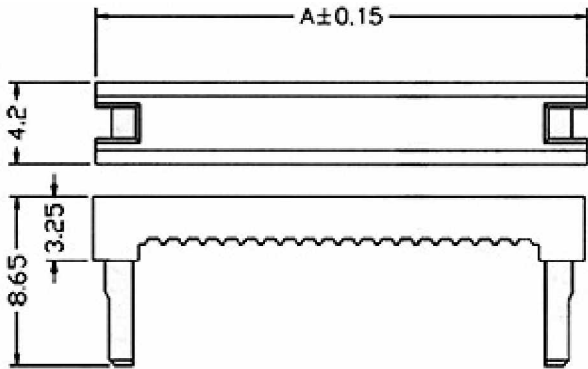

Position	Dimension	
	A	B
08	13.10	6.00
10	15.10	8.00
14	19.10	12.00
16	21.10	14.00
18	23.10	16.00
20	25.10	18.00
22	27.10	20.00
24	29.10	22.00
26	31.10	24.00
30	35.10	28.00
34	39.10	32.00
40	45.10	38.00
44	49.10	42.00
50	55.10	48.00

Ordering information

ZP	103-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series	No.of Pin Count	0:Selective Gold 1:Gold Plated	0:Black 1:Grey 2:Blue	0:With C.B 1:Without C.B	