



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area

Gold plated: 3u" over 50u" nickel

Cable: 0.635mm (0.025") pitch fiat cable

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105

Features:






- * Optional polarizing key, polarizing bump.
- * Optional strain relief.
- * Choices of gold plated or selective gold plated. or selective gold plated.

Yueqing shi kaifa electronic co.,ltd

Tel: 0086-13634204680

<http://www.china-electrical-supplier.com>

master@china-electrical-supplier.com

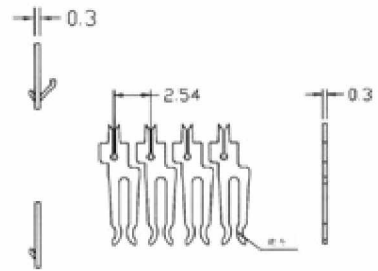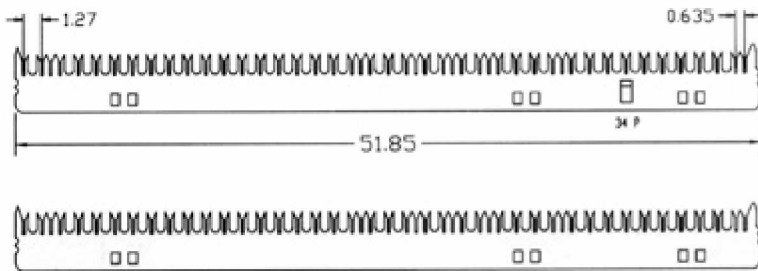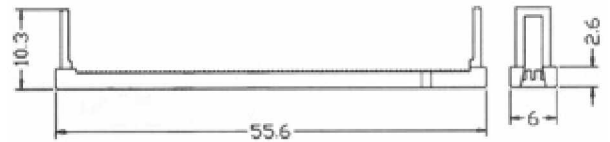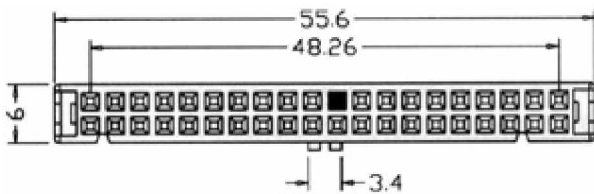

Ordering information

ZP	104-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series	No.of Pin Count	0:Selective Gold 1:Gold Plated	0:Black 1:Grey 2:Blue	0:With C.B 1:Without C.B	