



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts: Bronze

Plating: Gold plated:2u". over 50u" nickel

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105

Features:






- * Fully shrouded provides ultimate reliability,
- * Black or gray insulator available.
- * Choices of Eject lever.

Yueqing shi kaifa electronic co.,ltd

Tel: 0086-13634204680

<http://www.china-electrical-supplier.com>

master@china-electrical-supplier.com

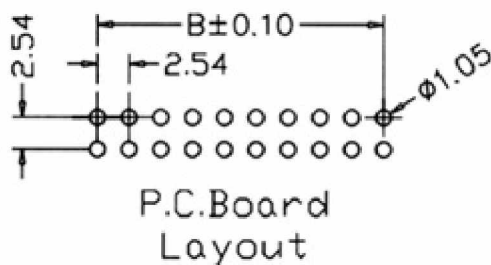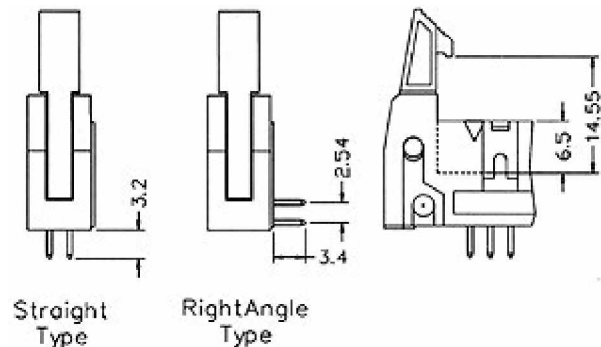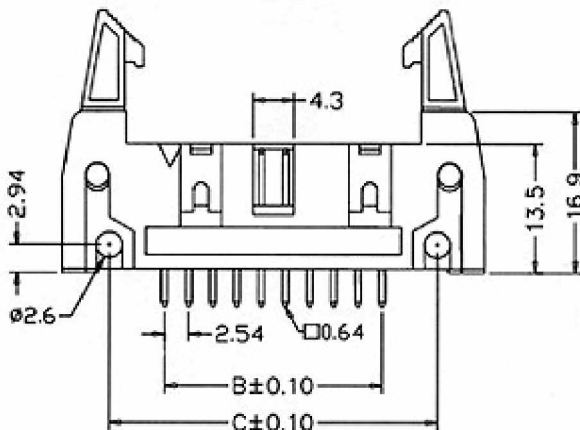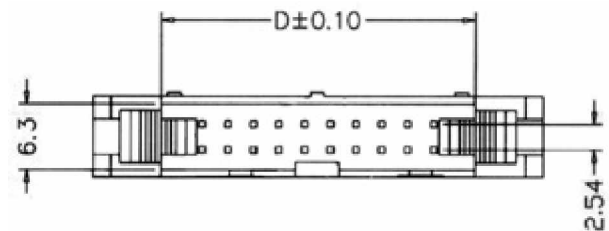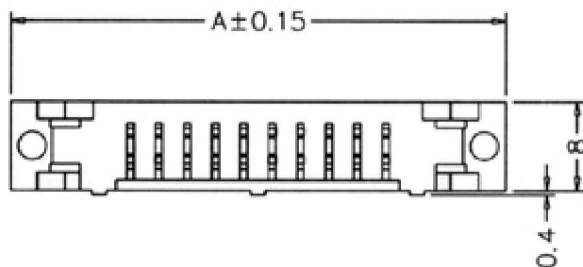

Position	A	B	C	D
06	26.52	5.08	16.76	13.22
08	29.06	7.62	19.30	15.76
10	31.60	10.16	21.84	18.30
14	36.68	15.24	26.92	23.38
16	39.22	17.78	29.46	25.92
20	44.30	22.86	34.54	31.00
26	51.92	30.48	42.16	38.62
30	57.00	35.56	47.24	43.70
34	62.08	40.64	52.32	48.78
40	69.70	48.26	59.94	56.40
50	82.40	60.96	72.64	69.10
60	95.10	73.66	85.34	81.80
64	100.18	78.74	90.42	86.88

Ordering information

ZP 106- ☐ ☐ ☐ ☐ ☐

Series No.of Pin Count 0:Gold flash full gold 1:Grey 2:Blue 0:Black 0:Straight 1:Right angle *2:Wire wrap

* Currently only straight wire wrap available and length is XX.XXmm