

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Gold plated: 2u" over 50u" nickel

Tin plated: 100u" over 50u" nickel

Cable: 1.00mm (0.039") pitch flat cable

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105

Features:







- * Fast connection of flat cable to PC board.
- * Plug directly into 2.00mmX2.00mm PC board.

Yueqing shi kaifa electronic co.,ltd

Tel: 0086-13634204680

<http://www.china-electrical-supplier.com>

master@china-electrical-supplier.com

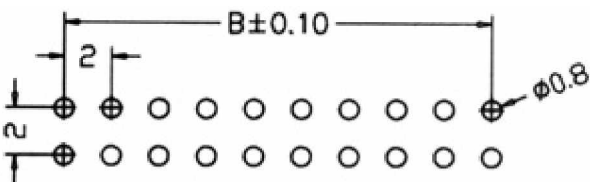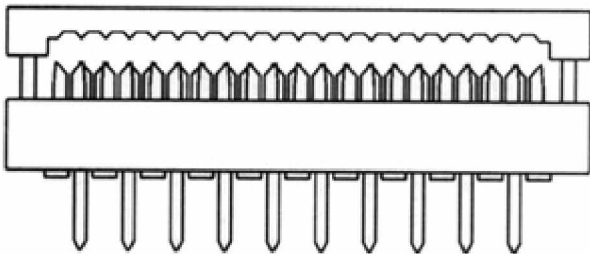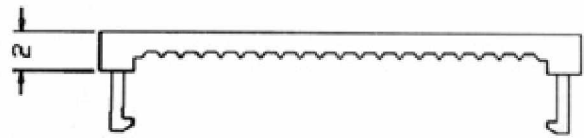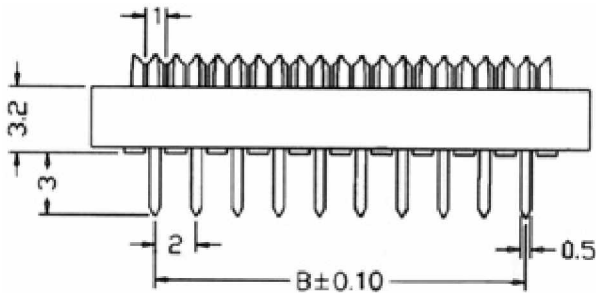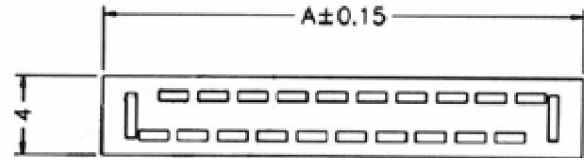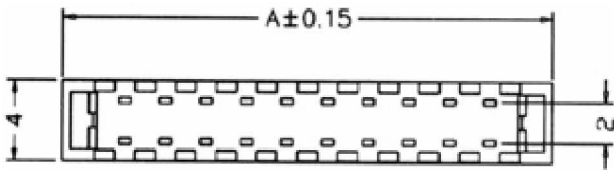

P.C.Board Layout

Position	Dimension	
	A	B
10	14.20	8.00
12	16.20	10.00
16	20.20	14.00
18	22.20	16.00
20	24.20	18.00
22	26.20	20.00
24	28.20	22.00
26	30.20	24.00
30	34.20	28.00
34	38.20	32.00
40	44.20	38.00
44	48.20	42.00
50	54.20	48.00

Ordering information

ZP 110-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series	No.of	0:Selective Gold plated	0:Black	
	Pin Count	1:Tin plated	1:Grey	