



Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass or Phosphor Bronze
 Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
 Gold plated: 2u" over 50u" nickel

Electrical Characteristics:






Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105

Features:

- * Wide range of board spacing choices.
- * Great product flexibility and strength.
- * Turning fork contacts offer lower cost for competitive market.

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
 master@china-electrical-supplier.com

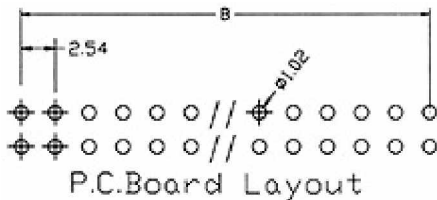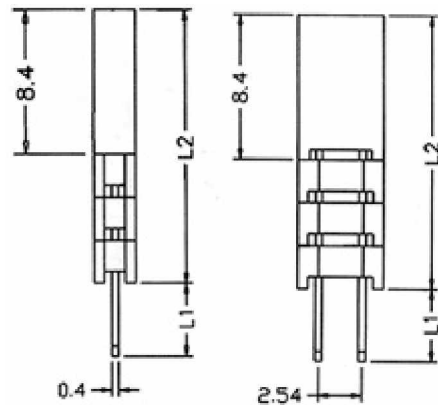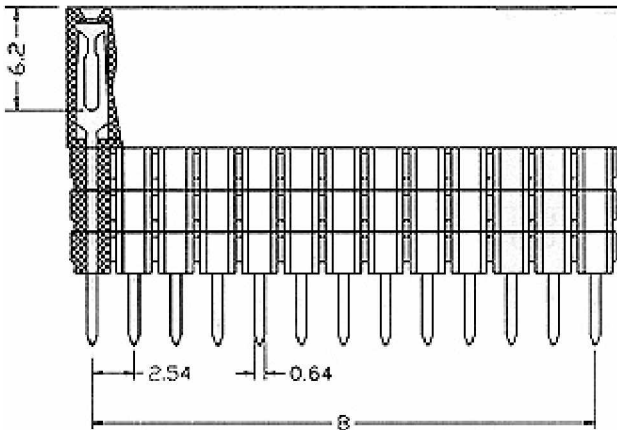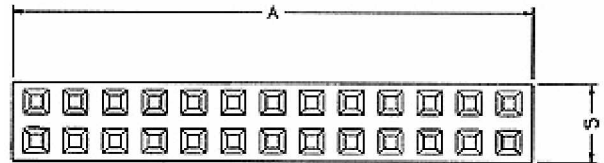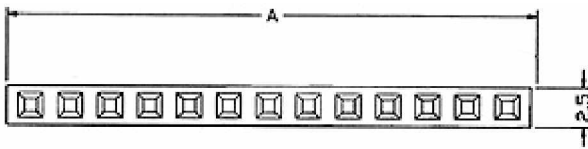

Position	4 Thru 80
Dimension	
A±0.20	2.54xNo.of Positions+0.5
B±0.15	2.54xNo.of Positions-2.54

Ordering information

ZP 119-

Series No.of 0:Gold plated
 Pin Count 1:Tin plated 0:Straight 0:Black
 3:Selective Gold plated

*L1:Dip Length L2:Mating Length