



Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass
 Plating: Gold plated: 2u" over 50u" nickel
 Tin plated: 50u" over 100u" nickel






Electrical Characteristics:

Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -55 ~+105

Features:

- * Custom design offered.
- * Two different print for surface mount desing.
- * Choice of through-hole and surface mount.
- * Staright type
- * Mates with O.46mm square pin.

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com

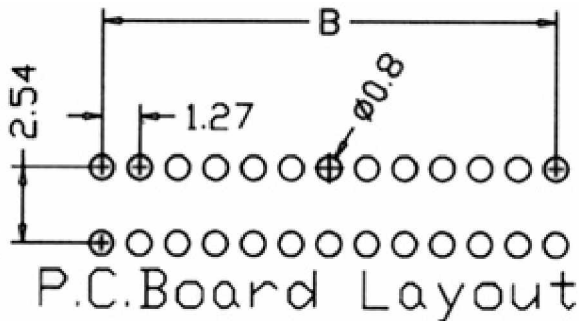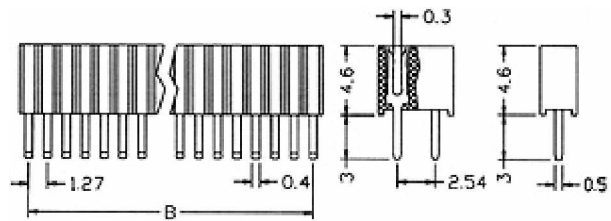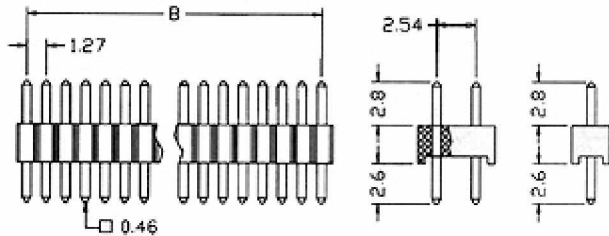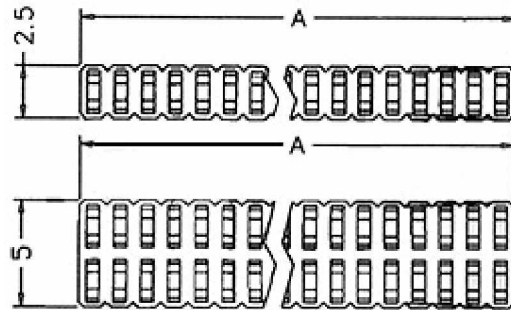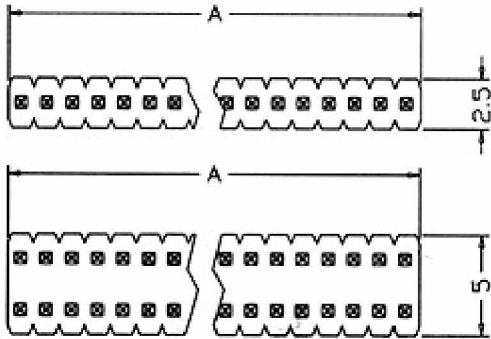

Position	2 Thru 100
Dimension	
A±0.20	1.27xNo.of Positions
B±0.10	1.27xNo.of Positions-1.27

Position	2 Thru 100
Dimension	
A±0.15	1.27xNo.of Positions+0.5
B±0.10	1.27xNo.of Positions-1.27

Ordering information

ZP 122 -
 Series No.of 0:PBT 0:Gold plated
 Pin Count 1:PPS 1:Tin plated