

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass or Phosphor Bronze
 Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area
 Gold plated: 3u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel

Electrical Characteristics:

Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V





Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105

Features:

- *IC Socket Strips - with screw machind pins
- *Single or double row - solder tail ~ standard 4 finger clip contacts.

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com

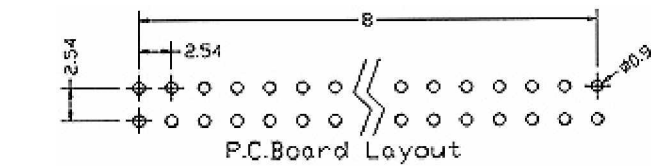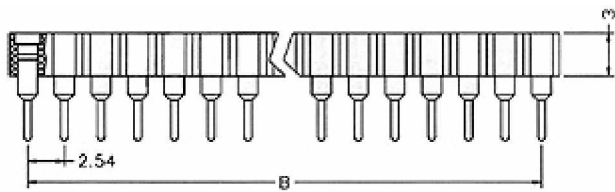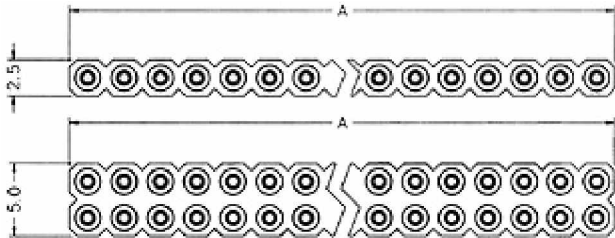

Position	2 Thru 80
Dimension	
A±0.20	2.54xNo.of Positions+0.5
B±0.15	2.54xNo.of Positions-2.0

Ordering information

ZP 124 -

Series No.of 0:Selective Gold plated 0:Black
 Pin Count 1:Tin plated 1:Grey
 2: Gold plated