




Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Tin plated: 100u" over 50u" nickel

Electrical Characteristics:

Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -55 ~+105 .

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
 master@china-electrical-supplier.com

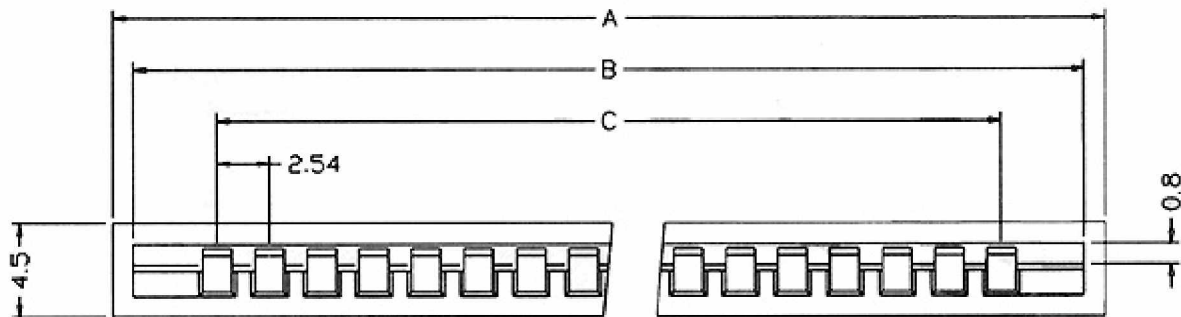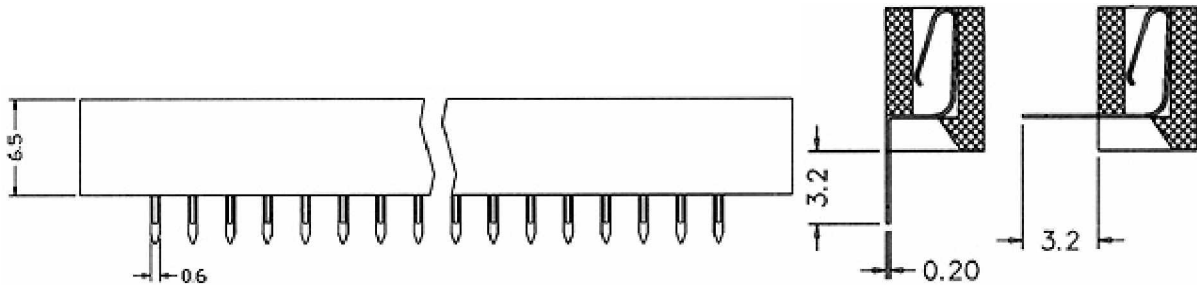

P.C.Board Layout

Position	3 Thru 21
Dimension	
A±0.20	(Position No.+2)x2.54
B±0.15	(Position No.x2.54)+2.68
C±0.15	(Position No.-1)x2.54

Ordering information

ZP 127 -
 Series No.of 0: Tin plated 0: Black
 Pin Count