



Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated: 2u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel





Electrical Characteristics:

Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -55 ~+105

Features:

- * Available in both straight and right angle.
- * Polarizing bump,
- * Turning fork contacts offer lower cost for competitive market.

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
 master@china-electrical-supplier.com

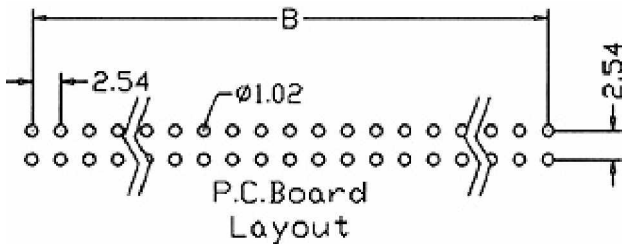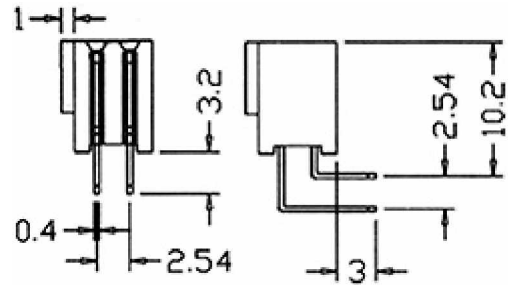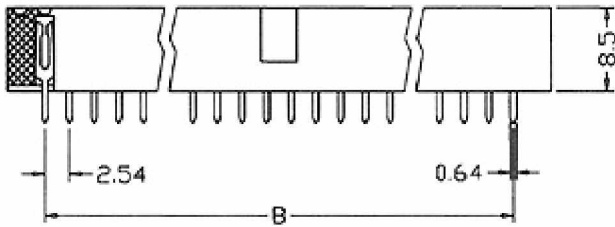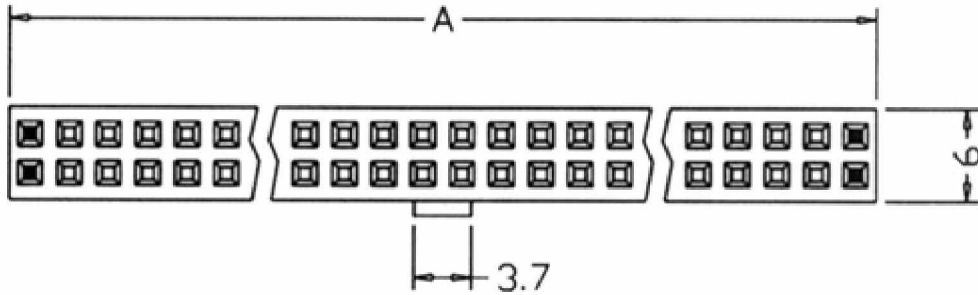

Position	10 Thru 64
Dimension	
A±0.20	2.54x(No.of Positions)+5.08
B±0.15	2.54x(No.of Positions)-2.54

Ordering information

ZP 128 -

Series No.of 0:Gold plated 0:Black 0:Straight
 Pin Count 1:Tin plated 1:Grey 1:Right angle