

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Gold plated: 2u" over 50u" nickel

Tin plated: 100u" over 50u" nickel

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩmax. at DC 100mA




Operating Temperature: -55 ~+105

Features:

* Available in open and close type.

* Various color available.

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com

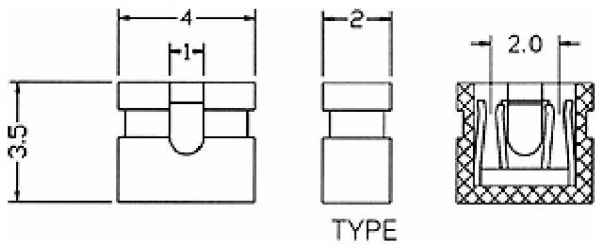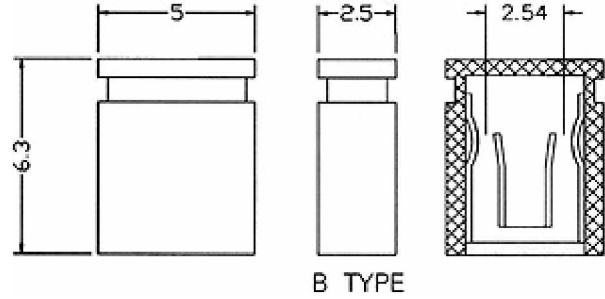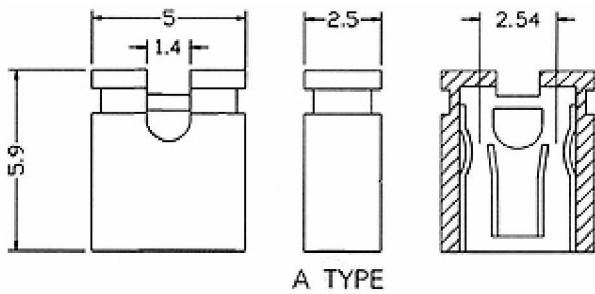

Ordering information

ZP 129 -	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Series	A	0:Gold plated	0:Black	Series	0:Gold plated	0:Black
	B	1:Tin plated	1:Red		1:Tin plated	1:Red
			2:Blue			2:Blue