


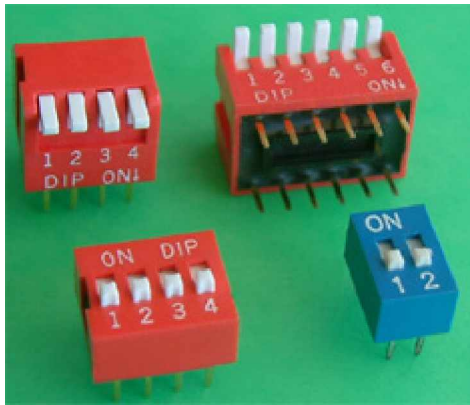

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Gold plated: 3u" over 50u" nickel

Electrical Characteristics:

Current Rating: 1 AMP

Insulator Resistance: 5000MΩmin. at DC 500V

Contact Resistance: 20mΩmax. at DC 100mA






Operating Temperature: -55 ~+105

Yueqing shi kaifa electronic co.,ltd

Tel: 0086-13634204680

<http://www.china-electrical-supplier.com>

master@china-electrical-supplier.com

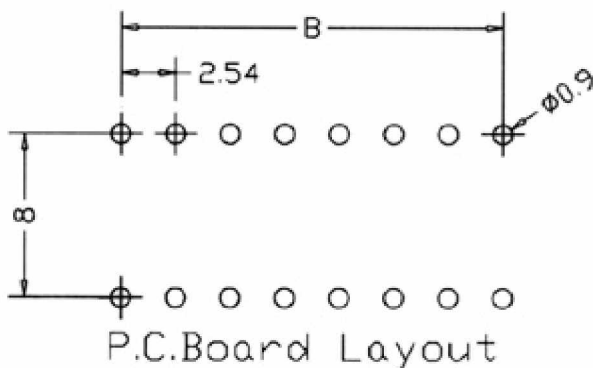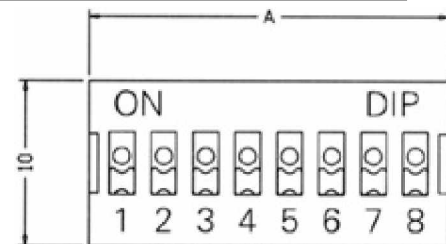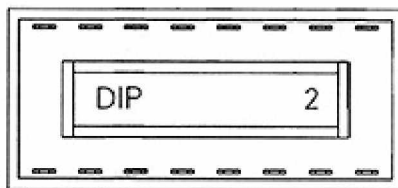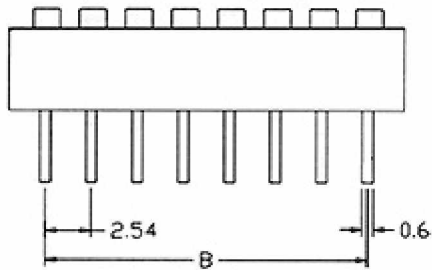

Position	Dimension	
	A±0.20	B±0.15
02	6.56	2.54
03	9.10	5.08
04	11.64	7.62
05	14.18	10.16
06	16.72	12.70
07	19.26	15.24
08	21.80	17.78
09	24.34	20.32
10	26.88	22.86
12	31.96	27.94

Ordering information

ZP 130 - ☐ ☐ ☐
 Series No.of 0:Red
 Pin Count 1:Blue