

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Shell: Steel, 100u" Tin Over 50u" min Nickel
 Clinch Nut: Brass, 100u" min Nickel Plated
 Screwlock: Brass, 100u" min Nickel Plated

Electrical Characteristics:

Current Rating: 2 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA

Operating Temperature: -55 ~+105 .

Yueqing shi kaifa electronic co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com

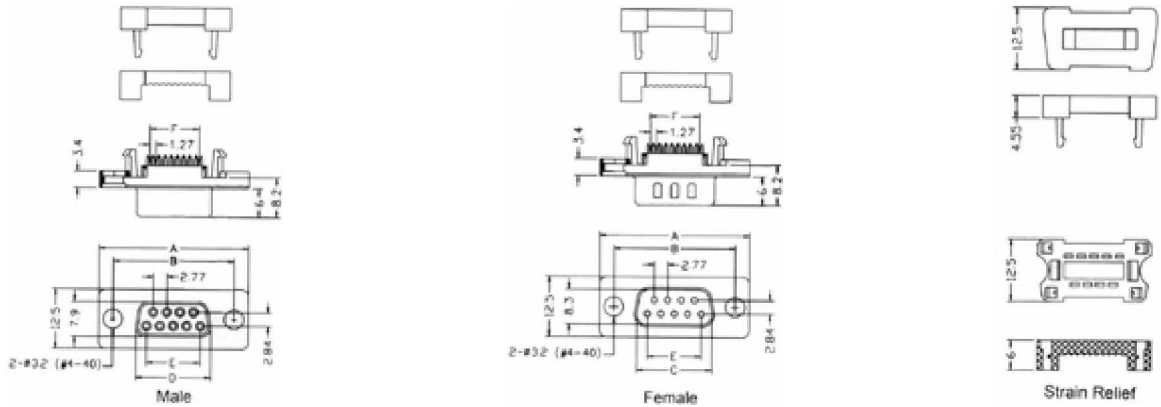

Position	A	B	C	D	E	F
09	30.9	25.0	16.9	16.3	11.09	10.16
15	39.2	33.2	25.2	24.6	19.39	17.78
25	53.1	47.0	39.1	38.5	33.24	30.48
37	69.4	63.5	55.4	54.8	49.86	45.72

Ordering information

ZP 132-

Series No.of 0:Male 0:Blue 0:φ3.2mm clar hole
 Pin Count 1:Female 1:Black 1:#4-40 UNCI