




Yueqing sunrising electronics co.,ltd
Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com


Specifications

Pitch	1.25mm
Poles	2~16
Useable wire range	AWG32#~28#
Applicable PC board thickness	0.6~1.2mm
Material	
Housing	Nylon66 UI94V-0
Pinheader	
1.Wafer	Nylon46 UI94V-0
2.Pin	Phosphor Bronze
3.Terminal	Phosphor Bronze


1.25mm-T




1.25mm-Y

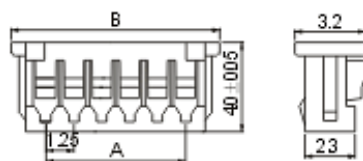


1.25mm-A

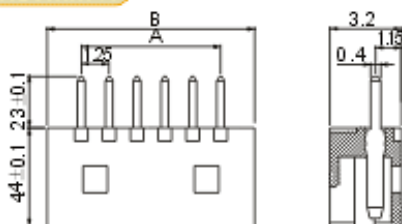


1.25mm-AW

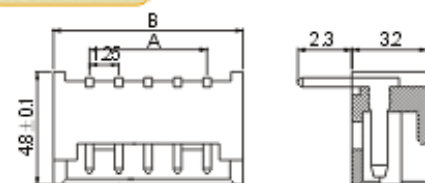

1.25mm-AWB

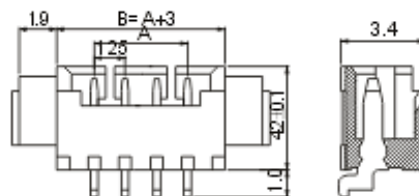

1.25mm-AB

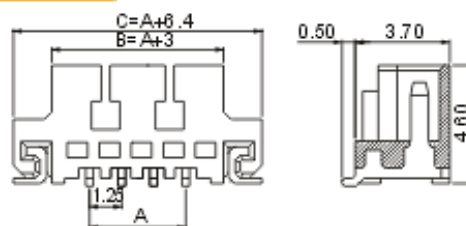

孔位 poles	型号(Type)					A	B
2	1.25-2Y	1.25-2A	1.25-2AW	1.25-2AWB	1.25-2AB	1.25	4.25
3	1.25-3Y	1.25-3A	1.25-3AW	1.25-3AWB	1.25-3AB	2.50	5.50
4	1.25-4Y	1.25-4A	1.25-4AW	1.25-4AWB	1.25-4AB	3.75	6.75
5	1.25-5Y	1.25-5A	1.25-5AW	1.25-5AWB	1.25-5AB	5.00	8.00
6	1.25-6Y	1.25-6A	1.25-6AW	1.25-6AWB	1.25-6AB	6.25	9.25
7	1.25-7Y	1.25-7A	1.25-7AW	1.25-7AWB	1.25-7AB	7.50	10.50
8	1.25-8Y	1.25-8A	1.25-8AW	1.25-8AWB	1.25-8AB	8.75	11.75
9	1.25-9Y	1.25-9A	1.25-9AW	1.25-9AWB	1.25-9AB	10.00	13.00
10	1.25-10Y	1.25-10A	1.25-10AW	1.25-10AWB	1.25-10AB	11.25	14.25
11	1.25-11Y	1.25-11A	1.25-11AW	1.25-11AWB	1.25-11AB	12.50	15.50
12	1.25-12Y	1.25-12A	1.25-12AW	1.25-12AWB	1.25-12AB	13.75	16.75
13	1.25-13Y	1.25-13A	1.25-13AW	1.25-13AWB	1.25-13AB	15.00	18.00
14	1.25-14Y	1.25-14A	1.25-14AW	1.25-14AWB	1.25-14AB	16.25	19.25
15	1.25-15Y	1.25-15A	1.25-15AW	1.25-15AWB	1.25-15AB	17.50	20.50
16	1.25-16Y	1.25-16A	1.25-16AW	1.25-16AWB	1.25-16AB	18.75	21.75