


Yueqing sunrising electronics co.,ltd  
 Tel: 0086-13634204680  
<http://www.china-electrical-supplier.com>  
[master@china-electrical-supplier.com](mailto:master@china-electrical-supplier.com)


Specifications

Pitch	1.5mm
Poles	2~12
Useable wire range	AWG30#~26#
Applicable PC board thickness	0.6~1.2mm
Material	
Housing	NYlon66 UL94V-0
Pin header	
1. Water	NYlon6646 UL94V-0
2. Pin	Brass
3. Terminal	Phosphor Bronze


ZH-T

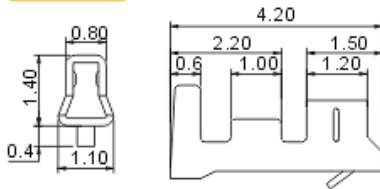


ZH-AB

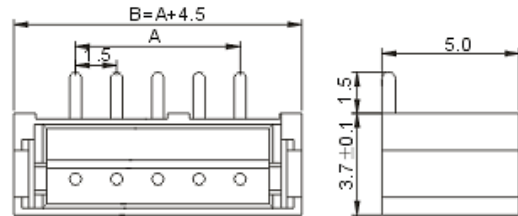


ZH-Y

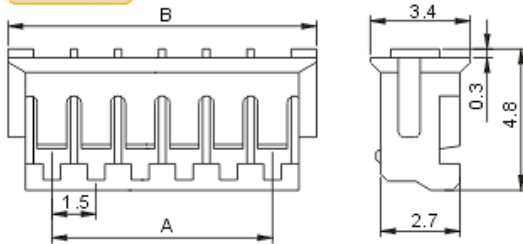


ZH-AWB

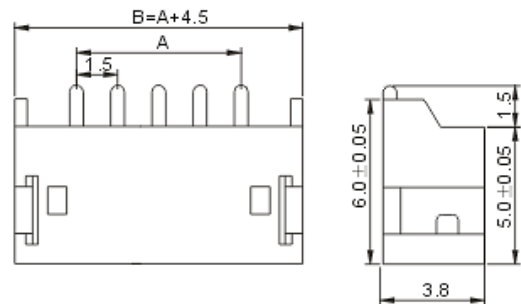

ZH-A

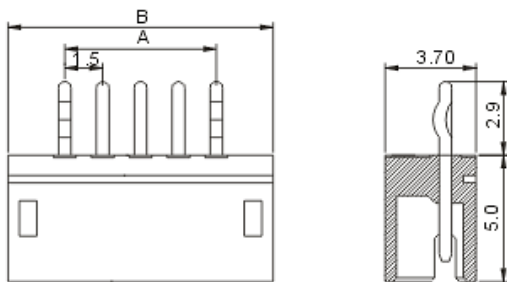

ZH-AW

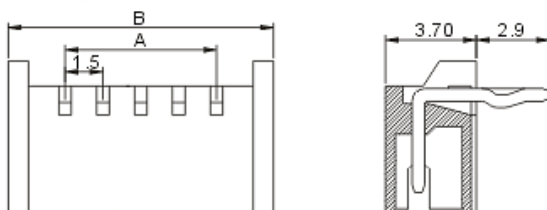

孔位 poles	型号(Type)					A	B
2	ZH-2Y	ZH-2A	ZH-2AW	ZH-2AWB	ZH-2AB	1.50	4.50
3	ZH-3Y	ZH-3A	ZH-3AW	ZH-3AWB	ZH-3AB	3.00	6.00
4	ZH-4Y	ZH-4A	ZH-4AW	ZH-4AWB	ZH-4AB	4.50	7.50
5	ZH-5Y	ZH-5A	ZH-5AW	ZH-5AWB	ZH-5AB	6.00	9.00
6	ZH-6Y	ZH-6A	ZH-6AW	ZH-6AWB	ZH-6AB	7.50	10.50
7	ZH-7Y	ZH-7A	ZH-7AW	ZH-7AWB	ZH-7AB	9.00	12.00
8	ZH-8Y	ZH-8A	ZH-8AW	ZH-8AWB	ZH-8AB	10.50	13.50
9	ZH-9Y	ZH-9A	ZH-9AW	ZH-9AWB	ZH-9AB	12.00	15.00
10	ZH-10Y	ZH-10A	ZH-10AW	ZH-10AWB	ZH-10AB	13.50	16.50
11	ZH-11Y	ZH-11A	ZH-11AW	ZH-11AWB	ZH-11AB	15.00	18.00
12	ZH-12Y	ZH-12A	ZH-12AW	ZH-12AWB	ZH-12AB	16.50	19.50