



Yueqing sunrising electronics co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com


Specifications

Pitch	2.5mm
Poles	2~15
Useable wire range	AWG28#~22#
Applicable PC board thickness	1.6mm
Material	
Housing	NYlon66 UL94V-0
Pin header	
1.Wafer	NYlon66 UL94V-0
2.Pin	Brass
3.Terminal	Phosphor Bronze


250-T




250-Y

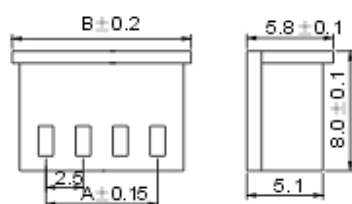


250-A

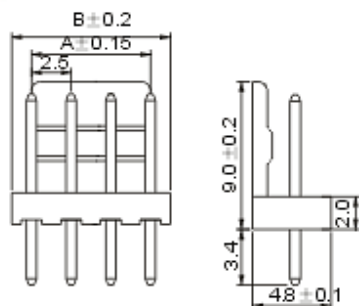

250-AW

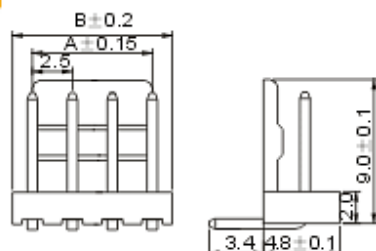

250-AWG

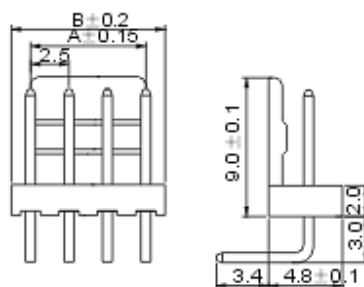

孔位 poles	型号(Type)				A	B
2	250-2Y	250-2A	250-2AW	250-2AWG	2.50	5.00
3	250-3Y	250-3A	250-3AW	250-3AWG	5.00	7.50
4	250-4Y	250-4A	250-4AW	250-4AWG	7.50	10.00
5	250-5Y	250-5A	250-5AW	250-5AWG	10.00	12.50
6	250-6Y	250-6A	250-6AW	250-6AWG	12.50	15.00
7	250-7Y	250-7A	250-7AW	250-7AWG	15.00	17.50
8	250-8Y	250-8A	250-8AW	250-8AWG	17.50	20.00
9	250-9Y	250-9A	250-9AW	250-9AWG	20.00	22.50
10	250-10Y	250-10A	250-10AW	250-10AWG	22.50	25.00
11	250-11Y	250-11A	250-11AW	250-11AWG	25.00	27.50
12	250-12Y	250-12A	250-12AW	250-12AWG	27.50	30.00
13	250-13Y	250-13A	250-13AW	250-13AWG	30.00	32.50
14	250-14Y	250-14A	250-14AW	250-14AWG	32.50	35.00
15	250-15Y	250-15A	250-15AW	250-15AWG	35.00	37.50