




Yueqing sunrising electronics co.,ltd
 Tel: 0086-13634204680
<http://www.china-electrical-supplier.com>
master@china-electrical-supplier.com


Specifications

Pitch	4.2mm
Poles	2~24
Useable wire range	AWG24#~18#
Applicable PC board thickness	1.6mm
Material	
Housing	NYlon66 UL94V-0
Pin header	
1.Wafer	NYlon66 UL94V-0
2.Pin	Brass
3.Terminal	Phosphor Bronze


5557-T




5559-T



5557-P

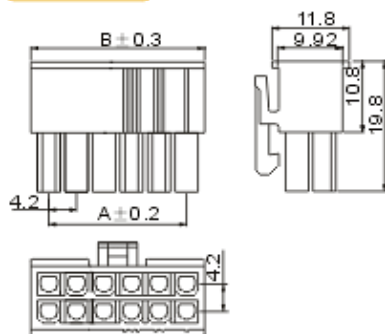

5559-R

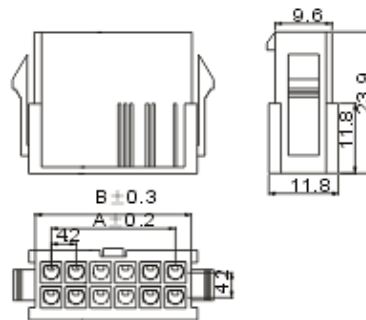

孔位 poles	型 号(Type)		A	B
2	5557-2P	5559-2R		8.70
4	5557-4P	5559-4R	4.20	12.90
6	5557-6P	5559-6R	8.40	17.10
8	5557-8P	5559-8R	12.60	21.30
10	5557-10P	5559-10R	16.80	25.50
12	5557-12P	5559-12R	21.00	29.70
14	5557-14P	5559-14R	25.20	33.90
16	5557-16P	5559-16R	29.40	38.10
18	5557-18P	5559-18R	33.60	42.30
20	5557-20P	5559-20R	37.80	46.50
22	5557-22P	5559-22R	42.00	50.70
24	5557-24P	5559-24R	46.20	54.90